

Catalogue extract  
92019\_01

CoeLux® HT  
High - Tech

# CoeLux® HT25

Coelux Products

© Copyright \_2019

The products here presented are covered by patents and patents applications.  
Details available at <https://www.coelux.com/en/patents/index>


CoeLux reserves the right to modify, without prior notification, the technical characteristics of the models illustrated in this catalogue.

Copy any part of this catalogue is strictly forbidden.

I prodotti qui presentati sono brevettati e coperti da domande di brevetto.  
Dettagli disponibili su <https://www.coelux.com/en/patents/index>

CoeLux si riserva il diritto di modificare, senza alcun preavviso le caratteristiche tecniche dei modelli illustrati nel presente catalogo.

Vietata la riproduzione parziale o totale del presente catalogo.

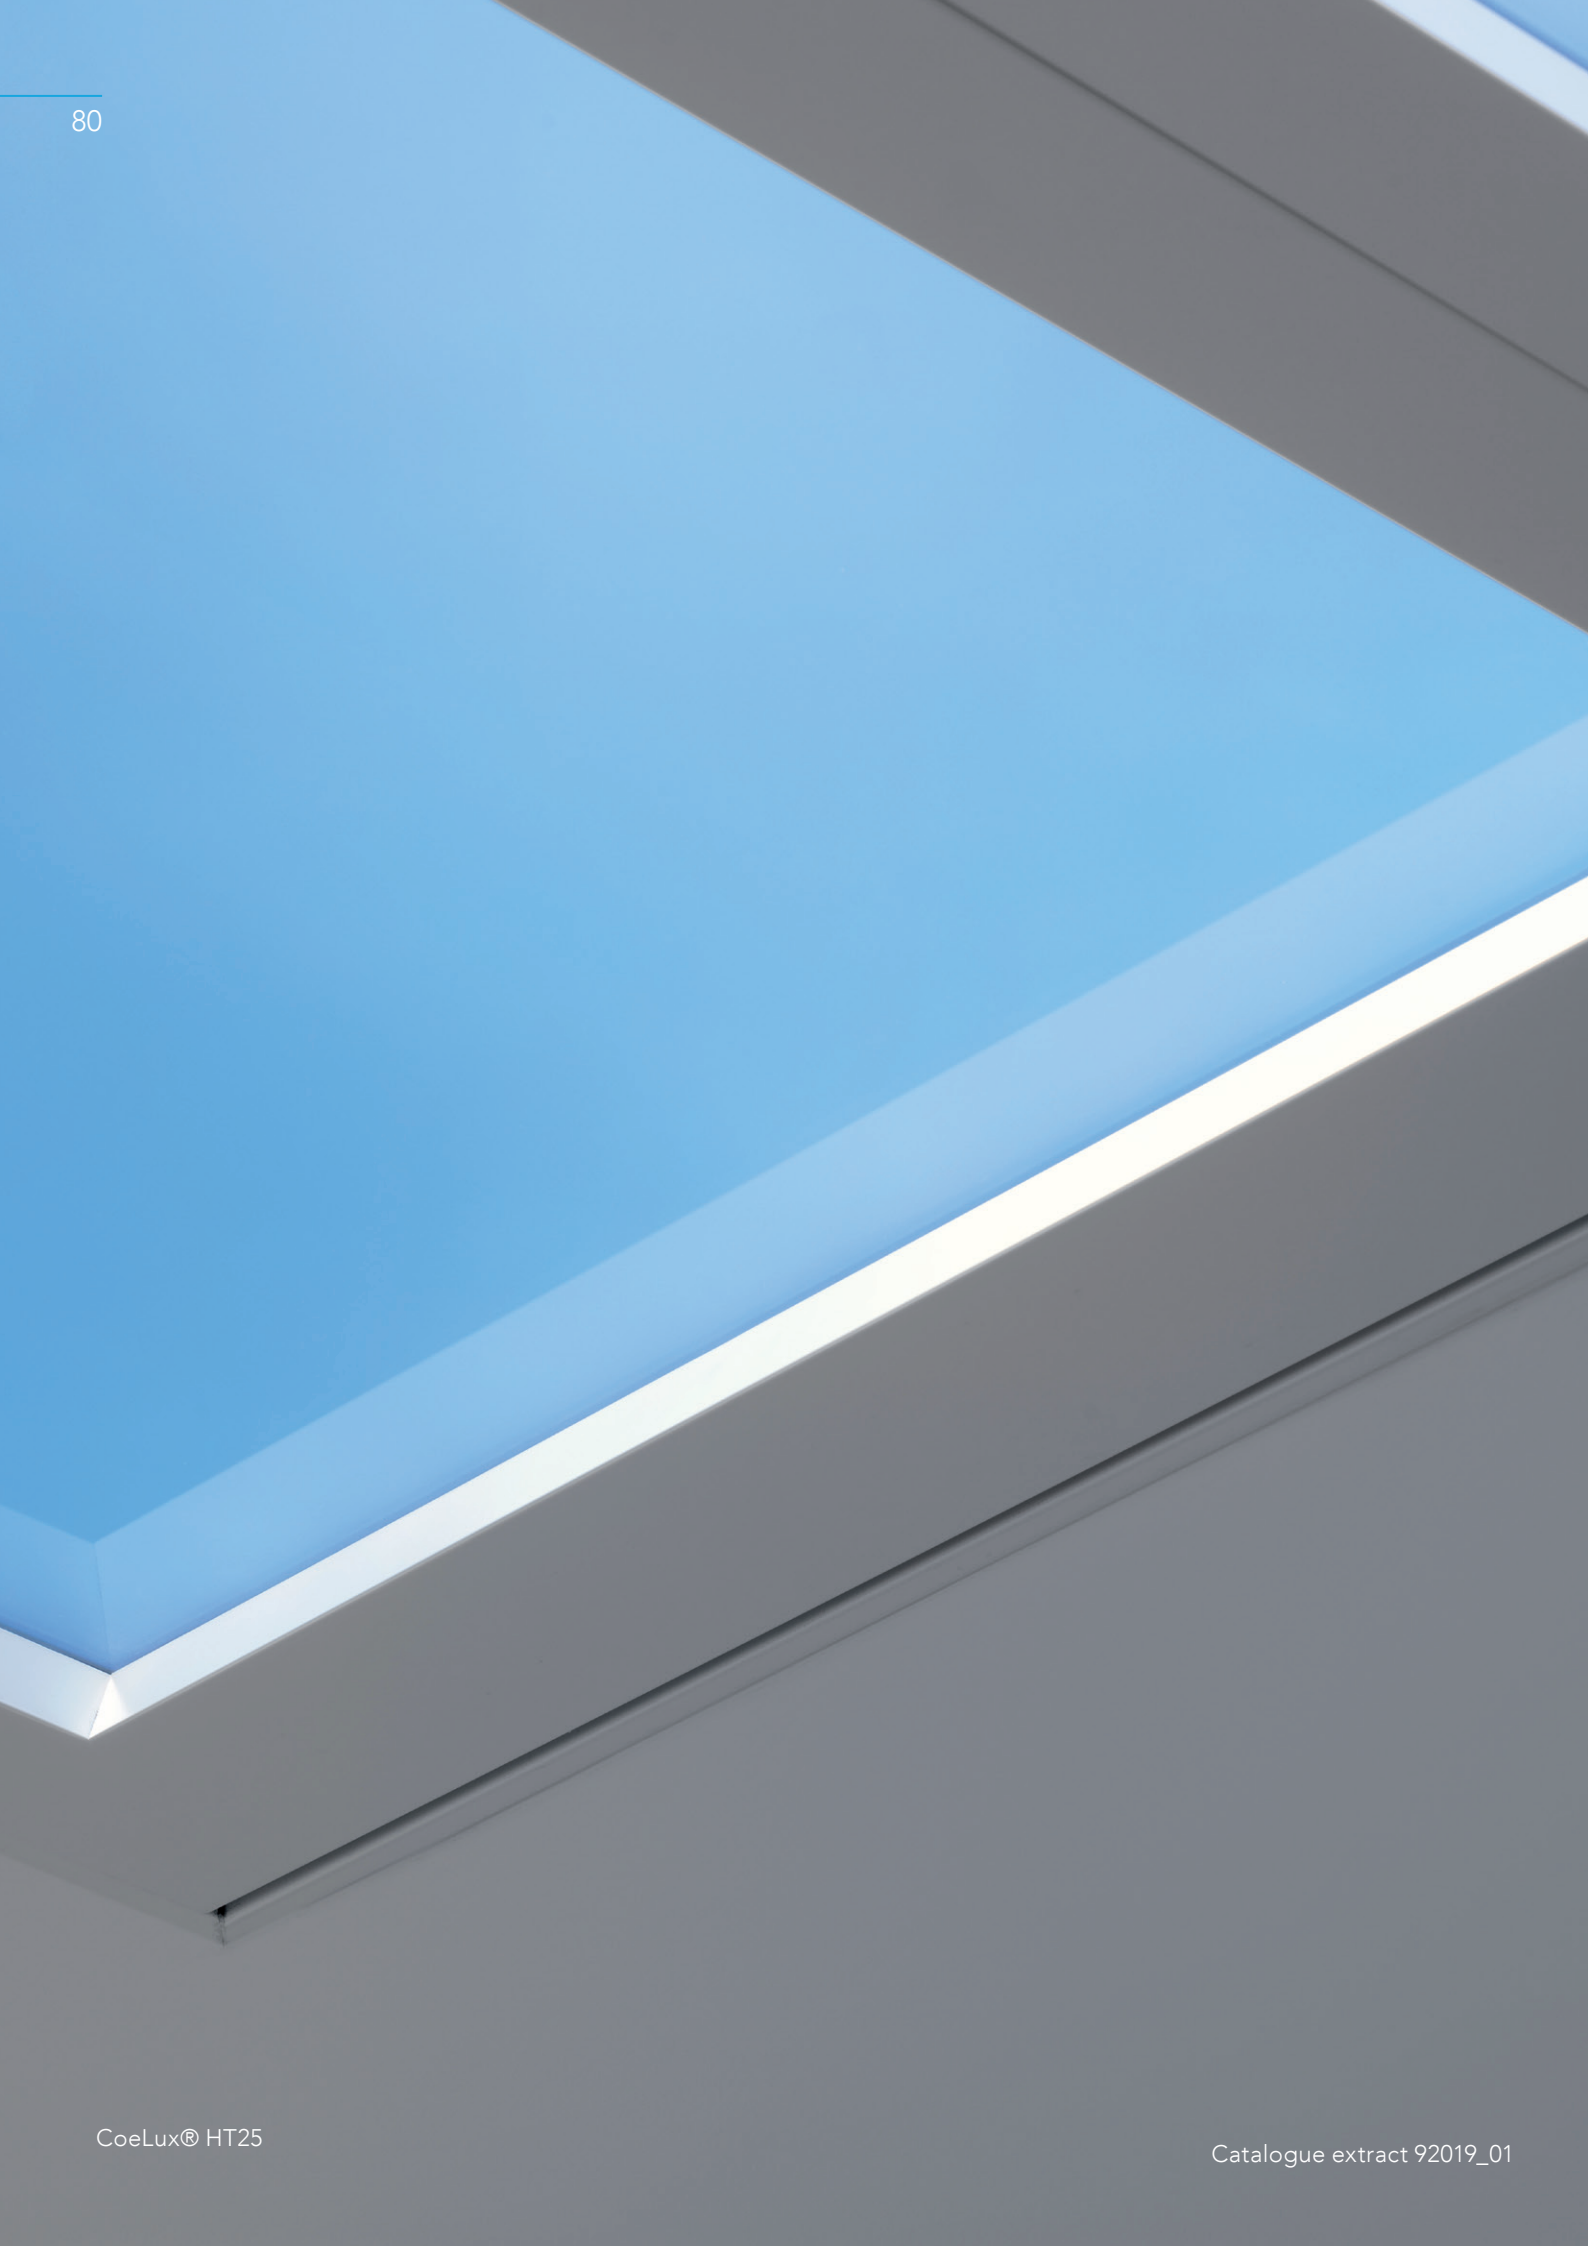



## CoeLux® HT25

High Tech Flat

---

Featuring a zenithal beam of light and a versatile design, CoeLux HT25 encloses a 25 cm thick rectangular window with a clear and serene sky. Ideal for creating semi-continuous windows, it can give the perception of large portions of sky.



---


*Caratterizzato da un fascio di luce zenitale e dal design versatile, CoeLux HT25 racchiude in 25 cm di spessore, una finestra rettangolare dal cielo terso e sereno. Ideale per la creazione di finestre semi-continue, regala la percezione di grandi porzioni di cielo.*

## CoeLux® HT25

### TECHNICAL INFORMATIONS:

|   |  |
|---|--|
| SKYLIGHT SIZE <i>Dimensione dello skylight</i>                        | 520 x 1070 mm   22.4 x 42.1"             |
| WEIGHT <i>Peso</i>  | 50 kg   110 lb                           |
| NECESSARY SPACE FOR INSTALLATION* <i>Dimensioni minime necessarie</i> | 1200 x 600 x 250 mm   47.2 x 23.6 x 9.8" |

|   |   |
|---|---|
|   |  zenith<br> 40-100% |
| POWER INPUT <i>Power input</i>  | 2 channels at 24 V DC   |
| POWER CONSUMPTION <i>Consumo energetico</i>                                 | 170 W (Max) - 170 W (Typical)   |
| TOTAL LIGHT OUTPUT <i>Emissione luminosa</i>                                | 5800 lm   |
| FRAME <i>Cornice</i>  | The frame can be ceiling mounted or recessed flushed mounted<br>La cornice può essere montata a filo del contro-soffitto o leggermente sporgente                                      |
| ORDER CODE   CERTIFICATION<br><i>Codice di ordinazione   Certificazione</i> | HT25   CE, CB, UL   |

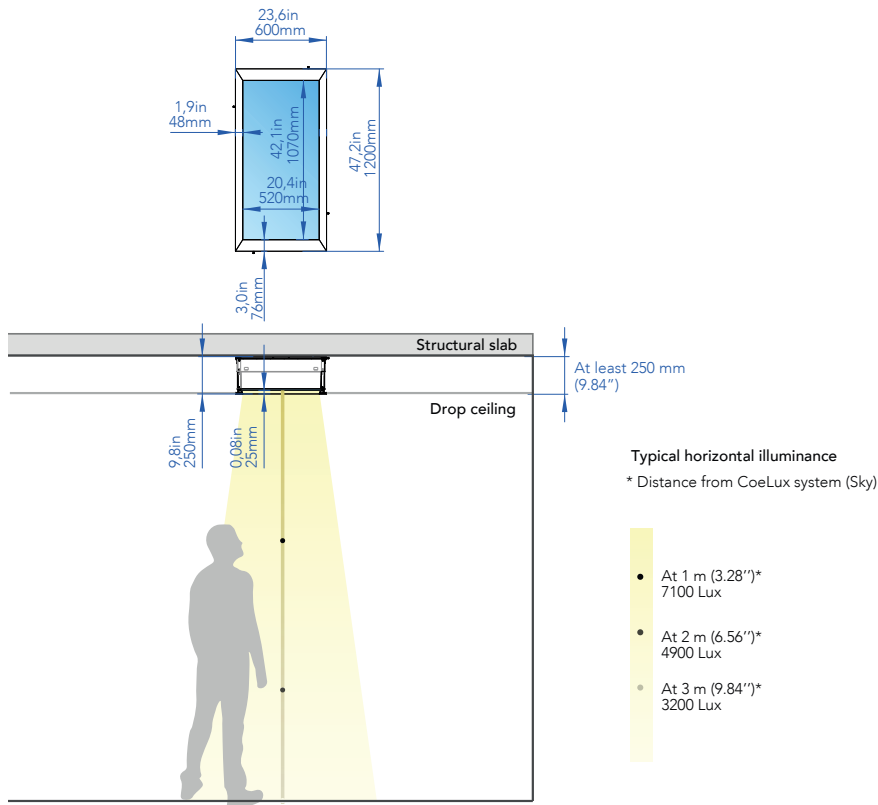

### FRAME TYPES:

**Ceiling mounted**  
Cornice in rilievo



**Recessed flushed**  
Cornice filo muro



CoeLux® HT25





By moving around the area below the system, the viewer will be able to see a large portion of sky. By standing underneath the system, the sun will appear slightly diffused and not too dazzling.

Muovendosi attorno all'area sottostante al sistema, l'osservatore sarà in grado di vedere un'ampia porzione di cielo; avvicinandosi ed entrando nel fascio di luce emesso comparirà il sole, leggermente diffuso e poco abbagliante.

